

CEE receptacles 16A and 32A, screwless connection technique

Other voltages and frequencies available on request.

Plugs for the world

Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	1340	1341	—
16	4	—	1342	1343
16	5	—	—	31
32	3	1345	1346	—
32	4	—	1347	1348
32	5	—	—	32

⚠ IP 44

Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	—	—	—
16	4	1750	1751	418
16	5	1755	1756	419
32	3	1851	420	1852
32	4	1855	1856	421
32	5	1860	1861	422

⚠ IP 44

Panel mounted receptacles with TwinCONTACT



screwless spring terminals, straight

A	P	110V	230V	400V
16	3	1667	1668	1669
16	4	1672	1673	1674
16	5	1678	1679	3385
32	3	1786	1787	1788
32	4	1789	1790	1791
32	5	1795	1796	1797

⚠ IP 44

Panel mounted receptacles with TwinCONTACT



screwless spring terminals, angled 20°

A	P	110V	230V	400V
16	3	1631	1632	1633
16	4	1636	1637	1638
16	5	1642	1643	3473
32	3	1733	1734	1735
32	4	1738	1739	1740
32	5	1744	1745	1746

⚠ IP 44

Panel mounted receptacles RAPIDO with TwinCONTACT



screwless spring terminals, central fixing, 61 mm Ø mounting hole

A	P	110V	230V	400V
16	3	1132	997	—
16	4	—	—	—
16	5	—	—	—
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

⚠ IP 44

Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	1719	1720	1721
16	4	—	1723	1724
16	5	—	1730	3331
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

⚠ IP 44

Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	1867	241	1868
16	4	1870	1871	242
16	5	1875	1876	200
32	3	1877	243	1878
32	4	1879	1880	244
32	5	1884	1885	245

⚠ IP 67

Panel mounted receptacles with TwinCONTACT



screwless spring terminals, straight

A	P	110V	230V	400V
16	3	1707	1708	1709
16	4	1710	1711	1712
16	5	1716	1717	1131
32	3	1809	1810	1811
32	4	1812	1813	1814
32	5	1818	1819	1820

⚠ IP 67

Panel mounted receptacles with TwinCONTACT



screwless spring terminals, angled 20°

A	P	110V	230V	400V
16	3	1700	1701	1702
16	4	—	1703	1704
16	5	—	—	3485
32	3	1801	1802	1803
32	4	—	1804	1805
32	5	—	—	1808

⚠ IP 67

Panel mounted receptacles RAPIDO with TwinCONTACT




screwless spring terminals, central fixing, 70 mm Ø mounting hole

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	1133	998
16	5	—	—	907
32	3	1135	987	—
32	4	—	1166	988
32	5	—	—	989

⚠ IP 44

TwinCONTACT Screwless connection technique

without screws, double terminal with split spring for throughwiring.

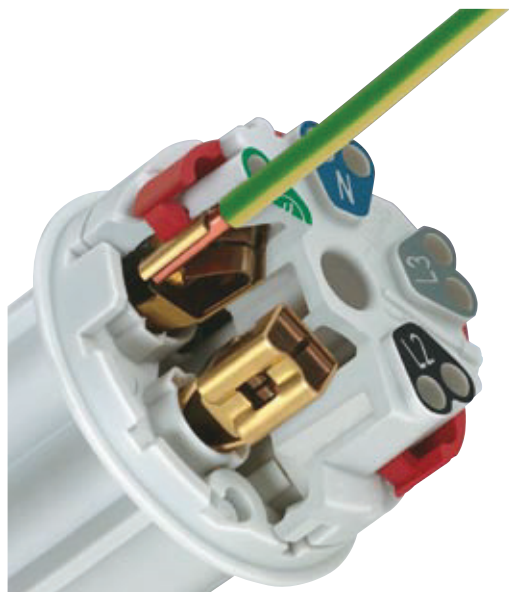

RAPIDO

RAPIDO receptacles are available with screw terminals or with screwless TwinCONTACT.

16A, 3p:

for mounting holes 61 mm diam. and wall thickness from 2 up to 5 mm.

16A, 4p + 5p and 32A:

for mounting holes 70 mm diam. and wall thickness from 2 up to 9 mm.

