


Product datasheet

Specifications

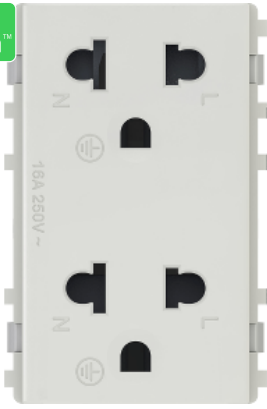

Concept - twin universal socket - 3 pin - 16A - 3 modules - push in

3426UEST2MP

3426UEST2MP has not been replaced. Please contact your customer care centre for more information.

⚠ Discontinued

Main

Range	Concept
Product or component type	Socket-outlet
Device presentation	Mechanism
Outlet poles configuration	2P + E with shutter
Outlet standard description	With earthing contact
Outlet standard	Universal
Colour tint	White
Type of packing	Flow-pack
Sale per indivisible quantity	1

Complementary

Number of power socket outlets	2
Device mounting	Flush
Ground lug position	Straight 0° position
Number of modules	3 modules
Fixing mode	Clip-in
Pin number	3
Surface finish	Glossy
Rated current	15 A at 250 V AC 50/60 Hz
Electrical durability	5000 cycles
Connections - terminals	3 push-in
Number of cables	3
Clamping connection capacity	1.5...4 mm ² for rigid cable(s) 1.5...4 mm ² for stranded cable(s)
Wire stripping length	12 mm
Material	PC (polycarbonate): cover PC (polycarbonate): base Nylon + GF: shutter Brass: contact Steel: terminals Steel: spring

Height	38 mm
Width	46 mm
Depth	70 mm
Embedding depth	37 mm

Environment

Ambient air temperature for storage	-5...50 °C
Dielectric strength	2000 V
Ambient air temperature for operation	-5...35 °C
Standards	IEC 60884-1
IP degree of protection	IP21
Environmental characteristic	Hydrogen peroxide (H2O2) Window-cleaning fluid Bleach Petrol UV resistant Acetone Oil Liquid soap Alcohol

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	56.5 g
Package 1 Height	3.87 cm
Package 1 width	4.6 cm
Package 1 Length	7.01 cm
Unit Type of Package 2	CAR
Number of Units in Package 2	200
Package 2 Weight	12243.0 g
Package 2 Height	21 cm
Package 2 width	33 cm
Package 2 Length	62.2 cm
Unit Type of Package 3	PAL
Number of Units in Package 3	3200
Package 3 Weight	207888.0 g
Package 3 Height	105 cm
Package 3 width	80 cm
Package 3 Length	100 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration

Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
