


# Product datasheet

Specifications

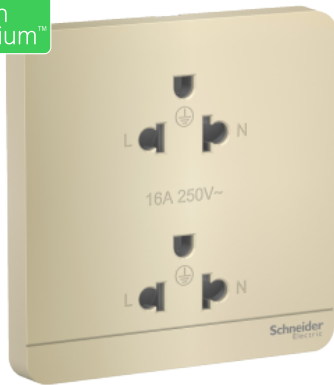

## AvatarOn, socket-outlet, 16A, 2 x 2P, universal, Wine Gold

E83426UES2\_WG

### Main

Product or component type	Socket-outlet
Device presentation	Complete product
Load type	Resistive Inductive
Colour tint	Wine gold
Outlet poles configuration	2 x 2P
Outlet standard	Universal

### Complementary

Rated current	16 A at 250 V AC 50 Hz
Socket number	2
Clamping connection capacity	1 x 4...2 x 4 mm <sup>2</sup> for solid cable(s) 1 x 4...2 x 4 mm <sup>2</sup> for stranded cable(s) 1 x 2.5...2 x 2.5 mm <sup>2</sup> for solid cable(s) 1 x 2.5...2 x 2.5 mm <sup>2</sup> for stranded cable(s)
Connections - terminals	Brass pillar Folded terminal
Material	Polycarbonate grid plate Polycarbonate surround
Device mounting	Surface Flush
Width	86 mm
Height	86 mm
Depth	26.7 mm
Embedding depth	17 mm

### Environment

IP degree of protection	IP20
Maximum ambient air temperature for operation	35 °C
Ambient air temperature for storage	-5...45 °C
Relative humidity	0...95 %
Environmental characteristic	No UV resistant

Operating altitude	5000 m
Standards	IEC 60884-1

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	100 g
Package 1 Height	4.5 cm
Package 1 width	8.5 cm
Package 1 Length	8.5 cm
SCC14	23606481455222
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	1 kg
Package 2 Height	9.5 cm
Package 2 width	15 cm
Package 2 Length	19 cm
Unit Type of Package 3	CAR
Number of Units in Package 3	60
Package 3 Weight	6 kg
Package 3 Height	21 cm
Package 3 width	30 cm
Package 3 Length	39.5 cm

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>