



Main

Range of product	Zelio Control
Product or component type	Modular measurement and control relays
Relay type	Current control relay
Relay name	RM35JA
Relay monitored parameters	Overcurrent or undercurrent detection Overcurrent or undercurrent in window mode
Time delay type	Adjustable 0.1...30 s, +/- 10 % of the full scale value on crossing the threshold Tt
Switching capacity in VA	2000 VA
Measurement range	150 mA...15 A current AC/DC 50/60 Hz 1.5...15 A E3-M terminals 0.5...5 A E2-M terminals 0.15...1.5 A E1-M terminals

Complementary

Reset time	≤ 1500 ms at maximum voltage
Maximum switching voltage	250 V AC
Minimum switching current	10 mA at 5 V DC
Maximum switching current	8 A AC
[Us] rated supply voltage	24...240 V AC/DC, 50/60 Hz (+/- 10 %)
Supply voltage limits	20.4...264 V AC/DC
Operating limits	- 15 % + 10 % Un
Power consumption in VA	3.5 VA AC
Power consumption in W	1.5 W DC
Resistance across terminals	0.05 Ohm at E1-M terminals 0.015 Ohm at E2-M terminals 0.005 Ohm at E3-M terminals
Output contacts	2 C/O
Internal input resistance	0.05 Ohm 0.015 Ohm 0.005 Ohm
Setting accuracy of the switching threshold	+/- 10 % of the full scale
Switching threshold drift	≤ 1 % within the supply voltage range ≤ 0.05 % per degree centigrade depending permissible ambient air temperature
Setting accuracy of time delay	10 P
Time delay drift	≤ 1 % within the supply voltage range ≤ 0.05 % per degree centigrade depending permissible ambient air temperature
Hysteresis	3 % fixed of full scale for window mode 5...50 % adjustable of threshold setting for overcurrent or undercurrent detection
Run-up delay at power-up	0.3 s
Measuring cycle	100 ms measurement cycle as true rms value
Repeat accuracy	+/- 2 % time delay +/- 0.5 % input and measurement circuit
Measurement error	0.05 %/°C with temperature variation < 1 % over the whole range with voltage variation
Response time	≤ 500 ms on crossing the threshold
Threshold setting	10...100 %
Overvoltage category	III conforming to UL 508 III conforming to IEC 60664-1
Insulation resistance	> 100 MOhm at 500 V DC conforming to IEC 60255-27

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Insulation	Between supply and measurement
Mounting position	Any position
Connections - terminals	Screw terminals 1 x 0.2...1 x 2.5 mm ² - AWG 24...AWG 14, flexible cable with cable end Screw terminals 1 x 0.5...1 x 3.3 mm ² - AWG 20...AWG 12, solid cable without cable end Screw terminals 2 x 0.2...2 x 1.5 mm ² - AWG 24...AWG 16, flexible cable with cable end Screw terminals 2 x 0.5...2 x 2.5 mm ² - AWG 20...AWG 14, solid cable without cable end
Tightening torque	0.6...1 N.m conforming to IEC 60947-1
Housing material	Self-extinguishing plastic
Status LED	LED green for power ON LED yellow for relay ON
Mounting support	35 mm DIN rail conforming to EN/IEC 60715
Electrical durability	100000 cycles
Mechanical durability	10000000 cycles
Utilisation category	DC-1 conforming to IEC 60947-4-1 AC-1 conforming to IEC 60947-4-1 DC-13 conforming to IEC 60947-5-1 AC-15 conforming to IEC 60947-5-1
Contacts material	Cadmium free
Width	35 mm
Product weight	0.12 kg

Environment


Immunity to microbreaks	50 ms
Electromagnetic compatibility	Emission standard for residential, commercial and light-industrial environments except radiated emission conforming to EN/IEC 61000-6-3 Conducted and radiated emissions class B conforming to CISPR 22 Conducted and radiated emissions class B group 1 conforming to CISPR 11 Surge immunity test 2 kV level 4 differential mode conforming to IEC 61000-4-5 Surge immunity test 4 kV level 4 common mode conforming to IEC 61000-4-5 Electrical fast transient/burst immunity test 2 kV level 4 capacitive coupling conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test 4 kV level 4 direct conforming to IEC 61000-4-4 Radiated radio-frequency electromagnetic field immunity test 10 V/m level 3 conforming to IEC 61000-4-3 Electrostatic discharge 8 kV level 3 air discharge conforming to IEC 61000-4-2 Electrostatic discharge 6 kV level 3 contact discharge conforming to IEC 61000-4-2 Emission standard for industrial environments conforming to EN/IEC 61000-6-4 Immunity for industrial environments conforming to EN/IEC 61000-6-2 Immunity for residential, commercial and light-industrial environments conforming to EN/IEC 61000-6-1
Standards	EN/IEC 60255-1
Product certifications	CCC CE CSA GL UL RCM EAC China RoHS
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-20...60 °C at 50 Hz AC/DC -20...50 °C at 60 Hz
Environmental characteristic	3K3 level C
Relative humidity	93...97 % at 25...55 °C conforming to IEC 60068-2-30
Vibration resistance	0.5 gn (f = 58.1...150 Hz) (in operation) conforming to IEC 60068-2-6 0.035 mm (f = 58.1...150 Hz) (in operation) conforming to IEC 60068-2-6 1 gn (f = 10...58.1 Hz) (not in operation) conforming to IEC 60068-2-6 0.075 mm (f = 10...58.1 Hz) (not in operation) conforming to IEC 60068-2-6
Shock resistance	5 gn for 11 ms (in operation) conforming to IEC 60068-2-27 15 gn for 11 ms (not in operation) conforming to IEC 60068-2-27
IP degree of protection	IP30 on housing conforming to IEC 60529 IP50 on front panel conforming to IEC 60529 IP20 on terminals conforming to IEC 60529

Pollution degree	3 conforming to UL 508 3 conforming to IEC 60664-1
Dielectric test voltage	2.5 kV for 1 min AC 50 Hz conforming to IEC 60255-27

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 2015 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available


Dimensions

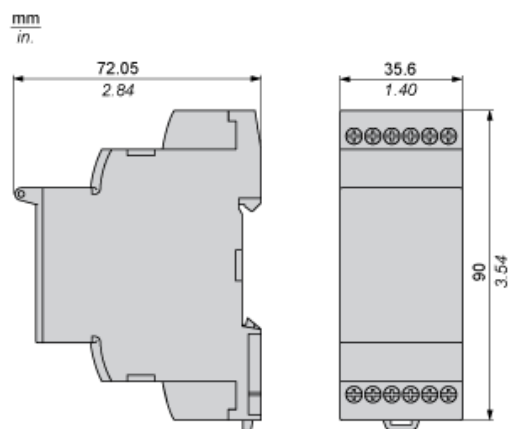

Mounting and Clearance


Rail Mounting

$\frac{\text{mm}}{\text{in.}}$

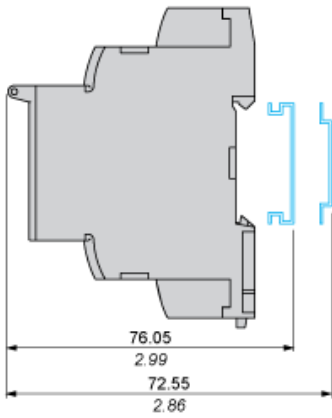

Current Measurement Relay

Wiring Diagram

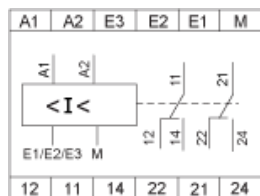

A1,A2 : Supply voltage

E1,E2,E3,M : Currents to be measured


11-14,12 : 1st C/O contact of output relay

21-24,22 : 2nd C/O contact of output relay


Function Diagrams

Undercurrent Detection

Without memory ("No Memory" mode)

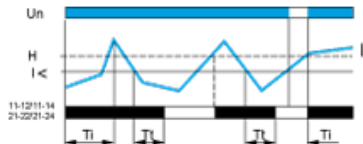


With memory ("Memory" mode)

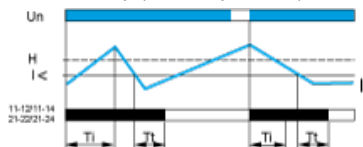

Overcurrent Detection

Without memory ("No Memory" mode)

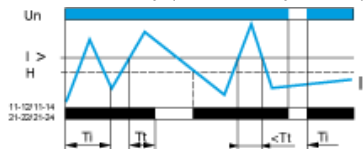

With memory ("Memory" mode)



Legend

- Ti Starting inhibition time delay
- Tt Time delay after crossing of threshold
- Un Supply voltage
- I Monitored current
- H Hysteresis
- I> Overcurrent threshold
- I< Undercurrent threshold
- 11-12/11-14, 21-22/21-24 Output relay connections
- Relay status: black color = energized.

NOTE: In "Memory" mode, the relay opens when crossing of the threshold is detected and then stays in that position. The power supply voltage must be switched off to reset the product.